




SBL135-12HR (12V3607W)

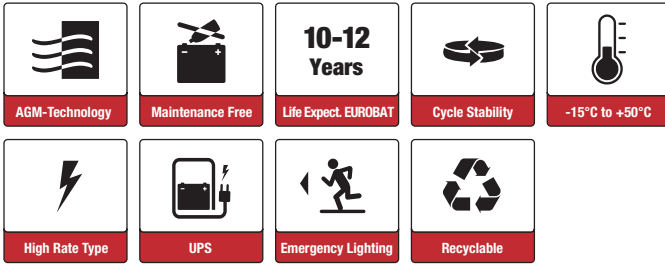

Applications

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Emergency light
- Railway signal
- Alarm and security system
- Communication power supply
- DC power supply

Certificates




Specifications

Nominal Voltage	12V	Operating Temp. Range	Discharge: -20~50°C
Nominal Capacity	121.0Ah (C ₁₀ , 9.6V)		Charge: -10~50°C
Approx. Weight	36.5kg		Storage: -20~50°C
Terminal	M8	Cycle Use	Initial Charging Current less than 36A.
Container Material	ABS UL94 HB		Voltage 14.7V +0.1V at 20°C.
Nominal Power	5 min 4462.2W		Temperature Coefficient -30mV/°C.
(20°C/ 9.6V/Block)	10 min 3607.2W	Standby Use	No limit on Initial Charging Current.
	15 min 2846.4W		Voltage 13.7V +0.1V at 20°C.
Nominal Power	5 min 743.7W		Temperature Coefficient -20mV/°C.
(20°C/ 1.6V/Cell)	10 min 601.2W	Capacity affected by Temp.	
	15 min 474.4W	40°C 103%	
Max. Discharge Current	1200A (5s)	25°C 100%	
Internal Resistance / Impedance (1kHz)	Approx. 4.5mΩ	0°C 86%	
Nominal Oper. Temp. R.	20±3°C	Self Discharge	SSB batteries may be stored for up to 6 months at 20°C and then a freshening charge is required. For higher temperatures the time interval will be shorter.
		Life Expectancy	10-12 years according to EUROBAT

Dimensions

■ M8 Terminal

Unit: mm | Dimensions: 407 Length X 177 Width X 225 Height (225 Height incl. Terminal)

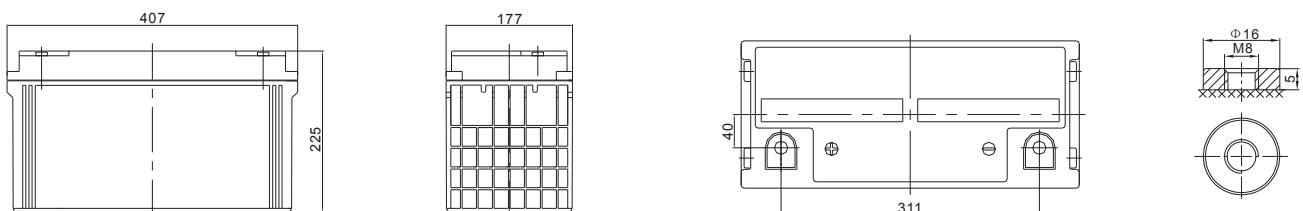


Constant Current Discharge (Amperes) at 20°C

F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	3h	5h	8h	10h
9.6V	404.7	342.5	319.7	248.9	202.6	149.4	86.4	62.0	31.98	21.93	14.65	12.10
10.0V	367.3	314.1	295.4	232.1	190.5	141.3	82.5	59.5	31.55	21.67	14.50	11.98
10.2V	351.7	301.9	284.8	225.0	185.1	137.9	80.8	58.4	30.99	21.34	14.31	11.83
10.5V	324.7	281.2	267.0	212.9	175.9	132.1	78.0	56.5	30.24	20.89	14.04	11.63
10.8V	297.5	260.4	249.2	201.4	167.6	126.5	75.2	54.7	29.25	20.30	13.70	11.36
11.1V	255.3	221.8	211.1	173.2	145.5	111.9	67.9	49.9	27.96	19.52	13.24	11.00


Constant Power Discharge (Watts/block) at 20°C

F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	3h	5h	8h	10h
9.6V	4462.2	3826.8	3607.2	2846.4	2337.0	1741.2	973.8	704.4	371.97	257.40	174.26	144.81
10.0V	4153.2	3590.4	3404.4	2700.0	2230.2	1669.8	937.2	681.0	369.29	255.74	173.03	143.74
10.2V	4016.4	3482.4	3309.6	2637.6	2182.2	1636.2	922.2	671.4	363.56	252.28	170.91	142.00
10.5V	3769.2	3291.0	3143.4	2523.6	2094.6	1582.2	897.0	653.4	356.26	247.83	168.10	139.72
10.8V	3508.2	3089.4	2968.2	2411.4	2015.4	1526.4	870.0	635.4	345.97	241.65	164.32	136.63
11.1V	3055.8	2668.2	2548.2	2095.8	1765.8	1362.0	791.4	584.4	332.16	233.17	159.19	132.55


Discharge Characteristics

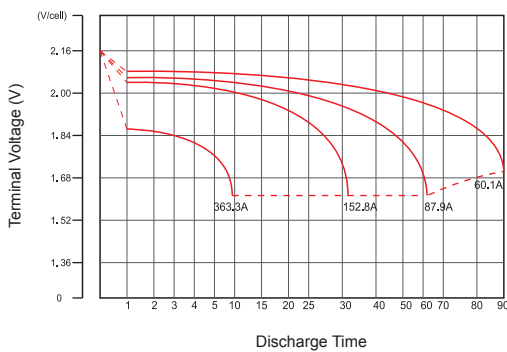

Float Charging Characteristics

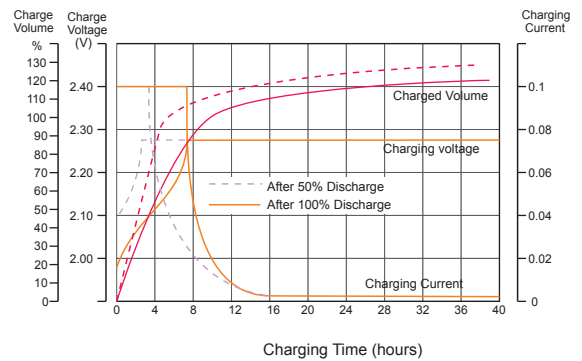

Temperature Effects in Relation to Battery Capacity

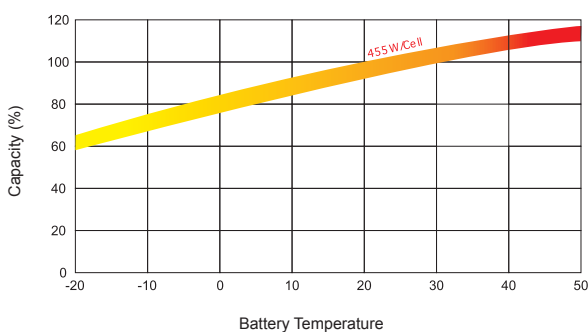

Effect of Temperature on Long Term Float Life

